





### Right Angle Female Type L/M/N Connectors for Free Boards






- These connectors have 3 or 6 cavities for high current, coaxial or fiber optic contacts. The MPC on type L and M provides alignment guides and accepts optional coding keys. The half-size type N is also provided with guiding and polarized pegs.

#### Recommended P.C.B. layout



Dimensions  
Type L

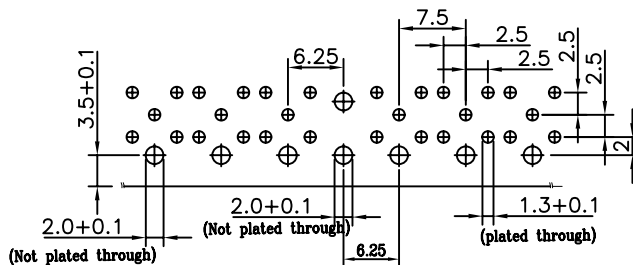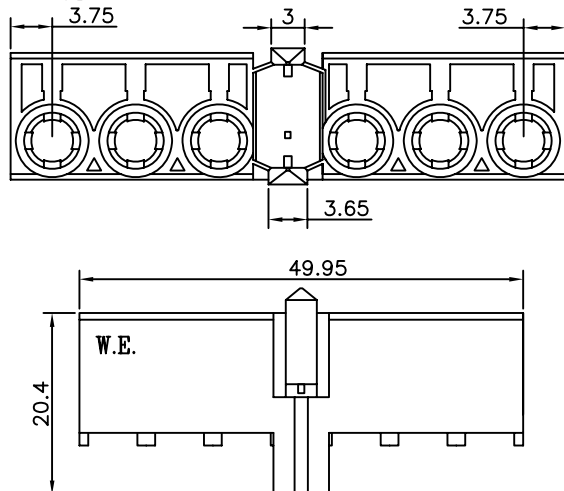

Type M

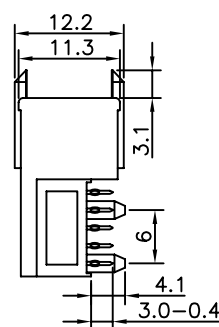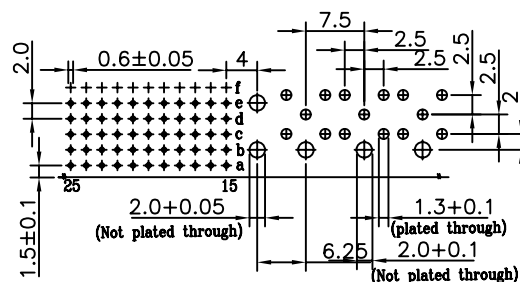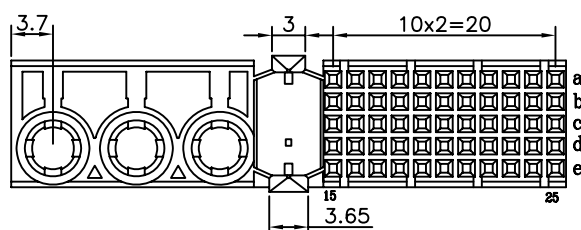


Type N

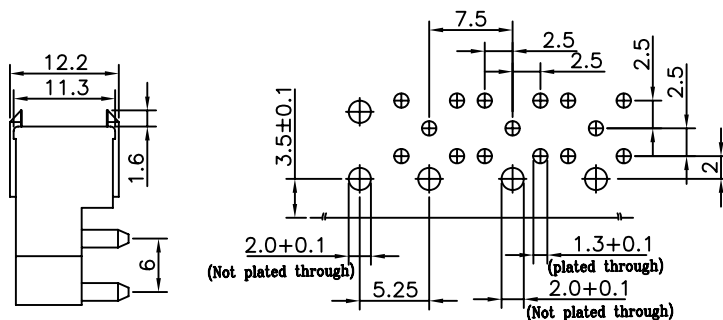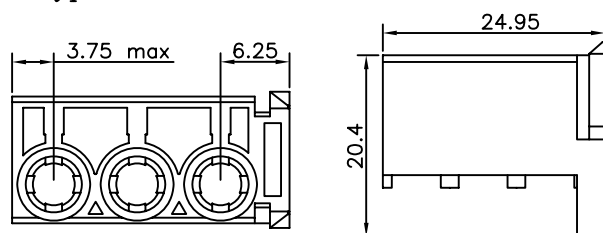

Dimensions shown are for reference purpose only. All dimensions are in millimeters unless otherwise specified.

## Ordering Information

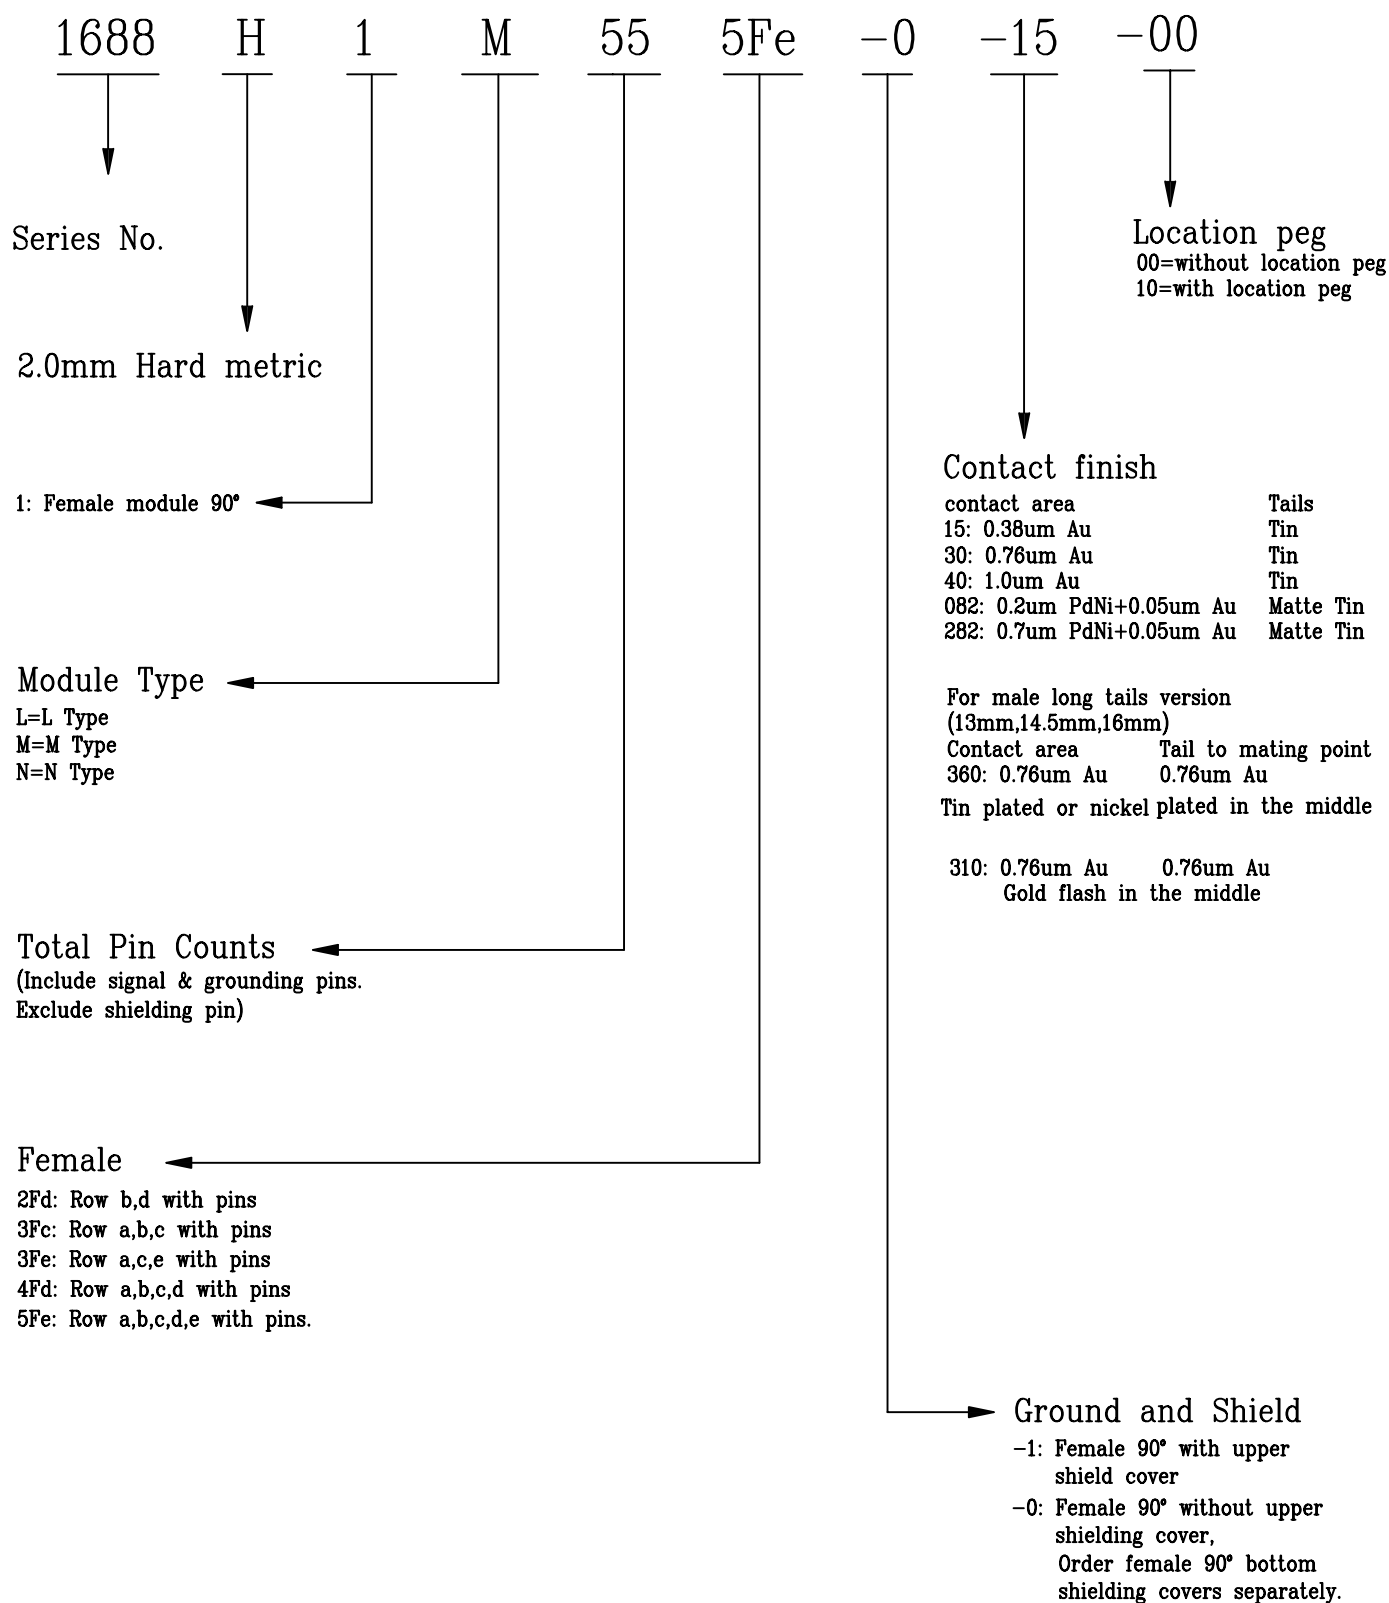

UL Approval