

616-2


Pin header strip 2.0mm pitch Horizontal SMT Type Single Row

Technical Data :


Insulator Material: High Temperature Thermoplastic,UL 94V-0
 Contact : 0.50x0.50mm.
 Contact Material: copper alloy
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Insulator resistance : 500 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : 136,316,618,618-1,619,620



RoHS Compliant

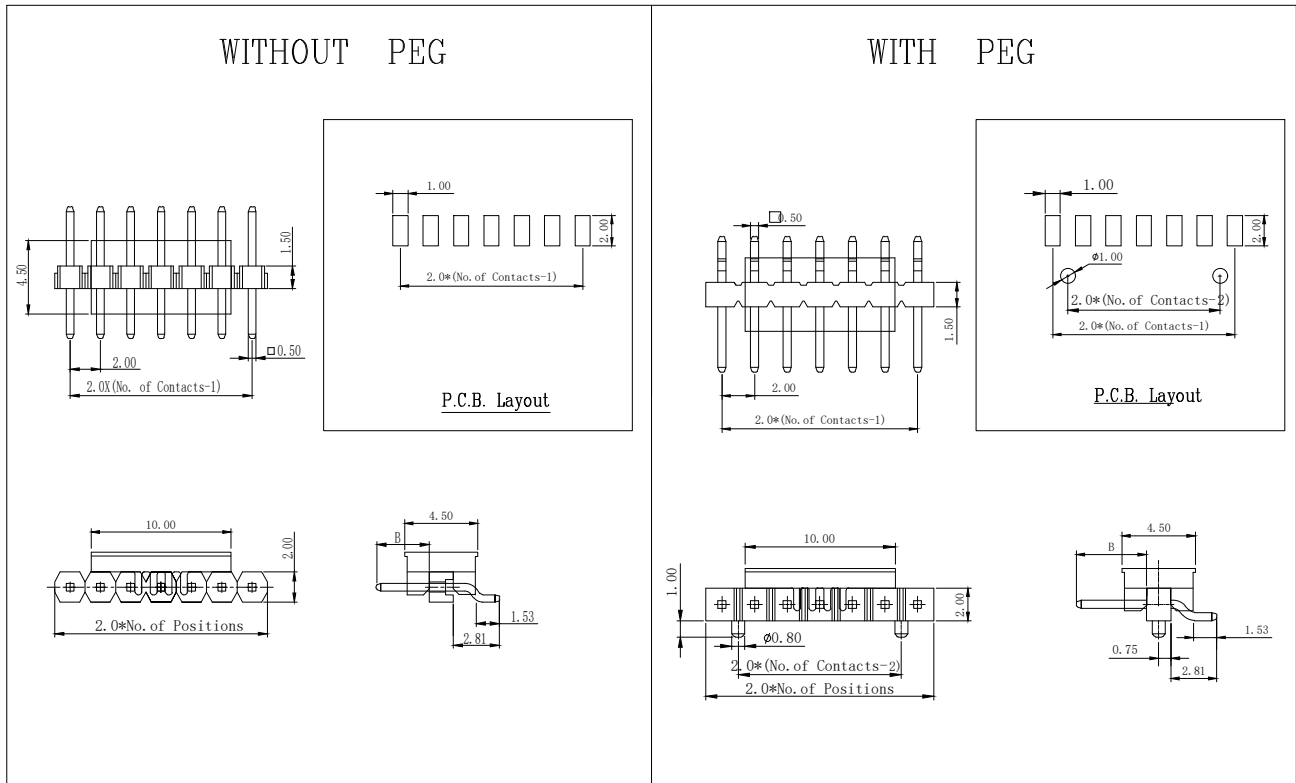

How to order



Dimension(mm) B	Terminal Code
3.20	10
4.45	11
4.0	12
As requert	XX
FOR Eg. B=2.80	
CODE Nr. =2.80	

Connector Type	Code
Single Row	1
Nr. of Contact	Code
02~36-Poles Single	02~36

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W/ Cap	1
W/O Cap	2

Packing option	Code
Tube	1
Tape & Reel	2

Location peg	Code
W/ Location peg	10
W/O Location peg	00

W.E.