

# 616-2

## Pin header strip 2.0mm pitch Horizontal SMT Type Double Row

### Technical Data :

Insulator Material: High Temperature Thermoplastic,UL 94V-0

Contact : 0.50x0.50mm.

Contact Material: copper alloy

Plating: Au or Sn over Nickel

Current Rating : 1 Amp


Insulator resistance : 500 Megohms min.

Dielectric withstanding : AC 500V for 1 Minute


Operating Temperature: -40°C to +105°C.

Max. processing Temp: 230°C for 30-60 seconds.  
260°C for 10 seconds.


Mates with : 136,316,618,618-1,619,620



### RoHS Compliant

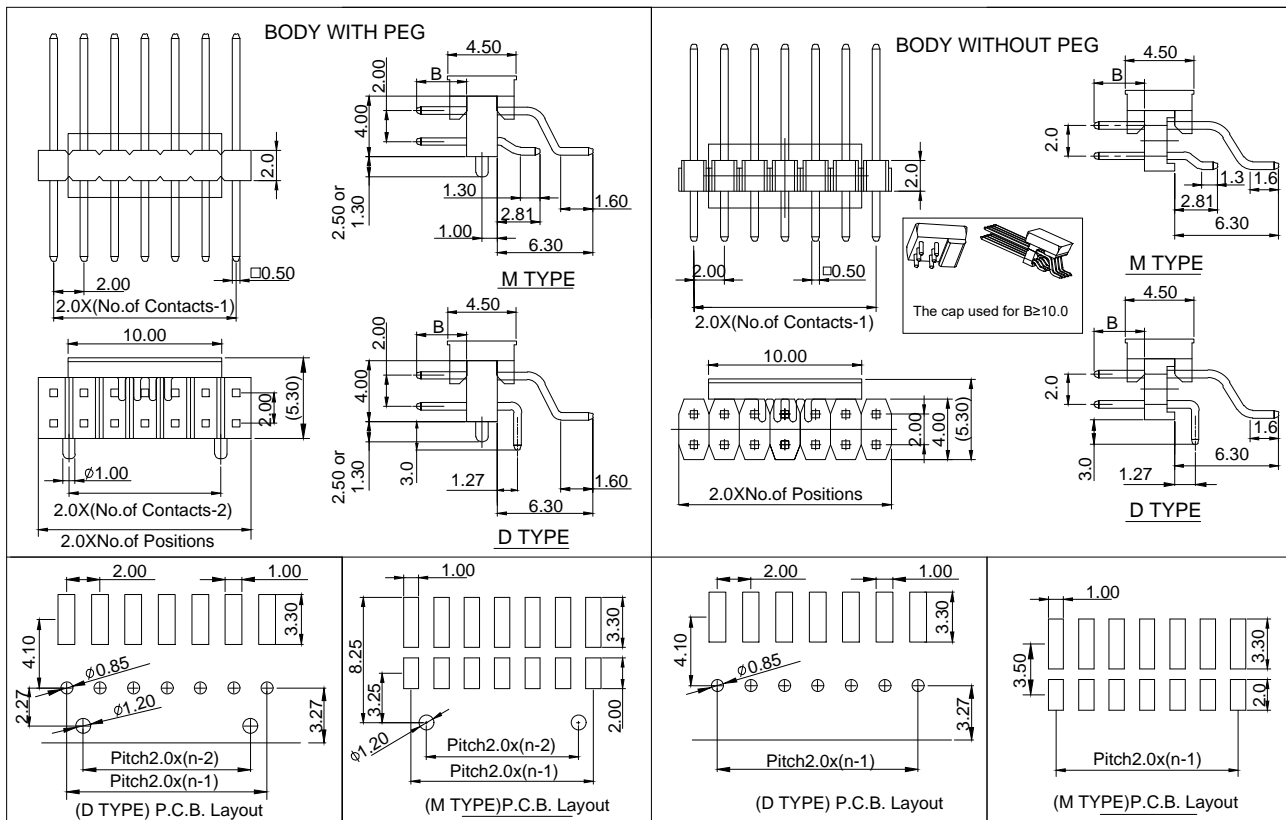

### How to order



Dimension(mm)	Terminal Code
3.20	10
4.45	11
4.0	12
As request	XX
FOR Eg. B=2.80	
CODE Nr. =2.80	

Connector Type	Code
Double Row M type	21
Double Row D type	22
Nr. of Contact	Code
04~72-Poles Double	04~72
Pick & Place pad	Code
W/ Cap	1
W/O Cap	2

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Packing option	Code
Tube	1
Tape & Reel	2
Location peg	Code
W/ Location peg height=2.50	10
W/ Location peg height=1.30	11
W/O Location peg	00

W.E.