


618


Economy Female header 2.0mm pitch SMT Type Height 4.3&4.5mm

Technical Data :


Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : Pitch 2.0mm, □ 0.50mm male header



RoHS Compliant

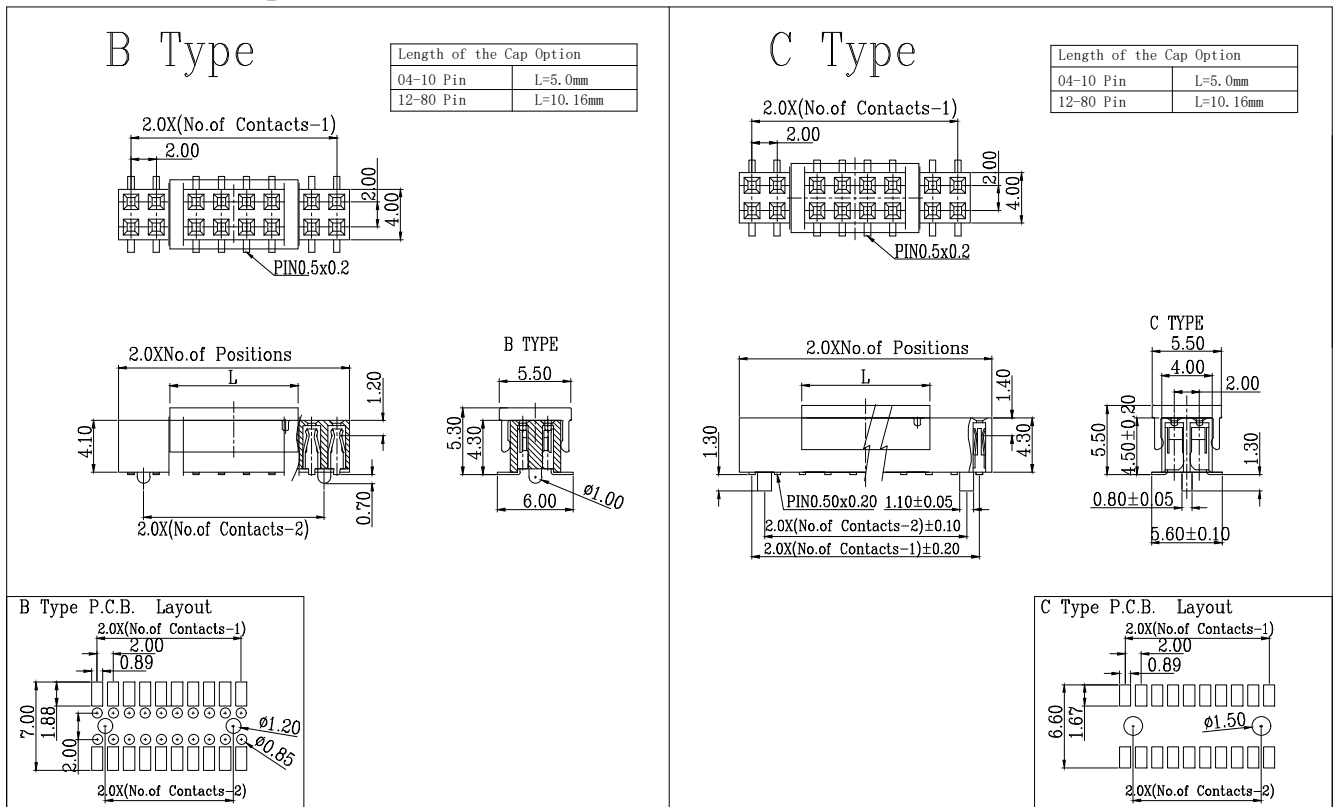

How to order



Number of contact	Code
Profile: 4.3mm 04 to 80 poles	04-80

Profile	Code
4.3mm B Type	3
4.5mm C Type	4

Pick & Place	Code
W/ Cap	1
W/O Cap	2

Locating peg option	Code
W/ Locating peg	10
W/O Locating peg	00

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10U" Selective gold plated	610
20U" Selective gold plated	620
30U" Selective gold plated	630

Packing option	Code
Tube	1
Tape & Reel	2

W.E.