

# 609A


Pin-Header-Strips-Double row for Surface Mount Technic and High-Temperature Body 1.27mm pitch

## Technical Data :

Insulator Material: High Temperature Thermoplastic,UL 94V-0.  
 Contact : 0.40x0.40mm  
 Contact Material: copper alloy  
 Plating: Au or Sn over Nickel  
 Current Rating : 1 Amp  
 Insulator resistance : 500 Megohms min  
 Dielectric withstanding : AC 500V for 1 Minute  
 Operating Temperature: -40°C to +105°C.  
 Max. processing Temp: 230°C for 30-60 seconds.  
 260°C for 10 seconds.  
 Mates with : 613 & □1.27 mm Pitch Female Header



## RoHS Compliant

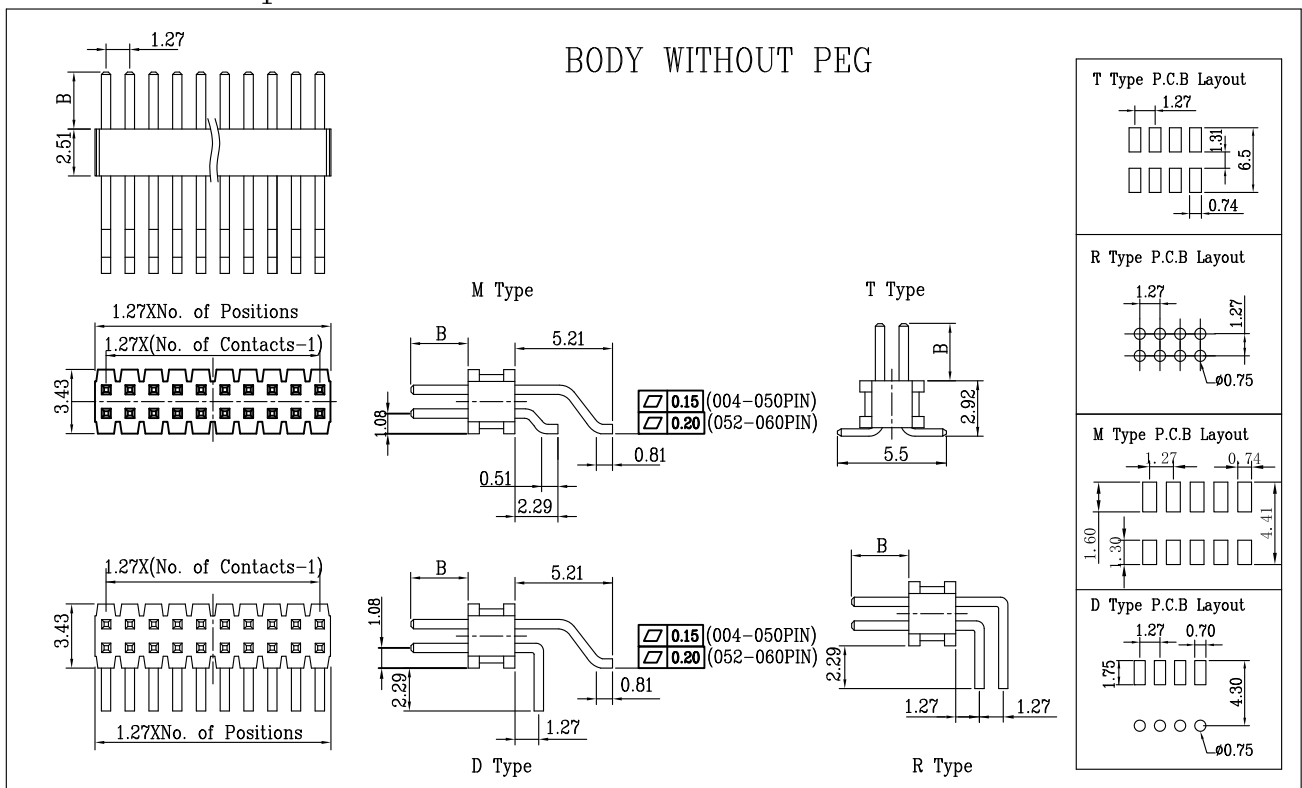

How to order **6 0 9 A** —    —  —  —   —  —  —

Serie-Nr.                      Nr.of Contact.                      Connector Type                      Dimension B                      Plating                      Cap option                      Packing                      Location Peg

Nr. of Contact	Code
Double Row 004-060 contacts(M Type)	004-060
Double Row 004-080 contacts(T Type)	004-080
Double Row 004-060 contacts(D Type)	004-060
Double Row 004-080 contacts(R Type)	004-080

Dimensions(mm)		Code
B		
3.05		1
1.91		2
1.65		3
3.81		4

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W / Cap	1
W / 0 Cap	2

Packing option	Code
Tube	1
Tape & Reel	2

Connector Type	Code
D Type	1
M Type	2
T Type	3
R Type	4

Location Peg	Code
W/0 Location Peg	00

W.E.