

604


High Density Female header SMT Type 1.27mm pitch

Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 500 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.

Mates with : Pitch 1.27mm, □0.46mm male header

RoHS Compliant

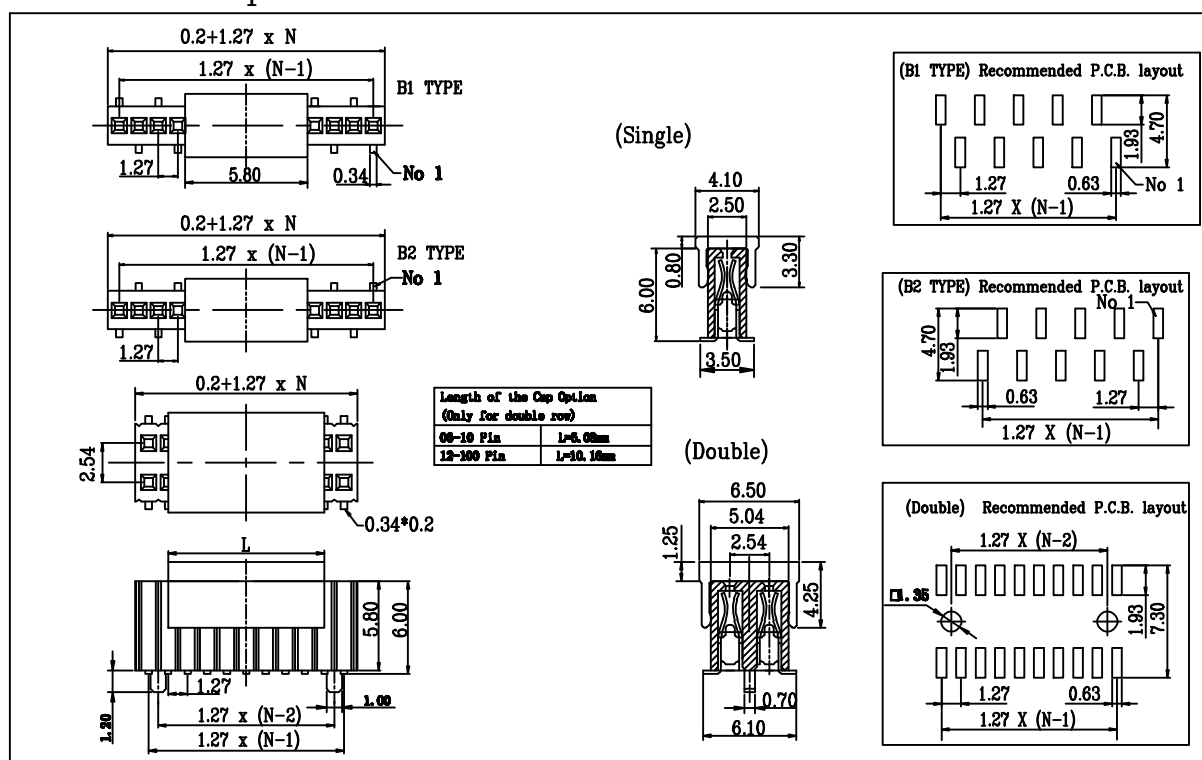

How to order

6 0 4 — — — — —
 Serie-Nr. Nr. of Contact. Nr. of Row Plating Cap Option Packing Locating peg

Number of contact	Code
Single Row Max. 40 poles	003-040
Double Row Max. 100 poles	006-100

Number of Row	Code
Single B1	11
Single B2	12
Double	20

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

Location Peg Option	Code	Note
W/ Location Peg	10	8Pin Min
W/O Location Peg	00	

For Double row only

W.E.