


606-1


Female Header 1.27mm Pitch Bottom Entry SMT Type For square pin

Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 500 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : Pitch 1.27mm, □ 0.40mm male header



RoHS Compliant

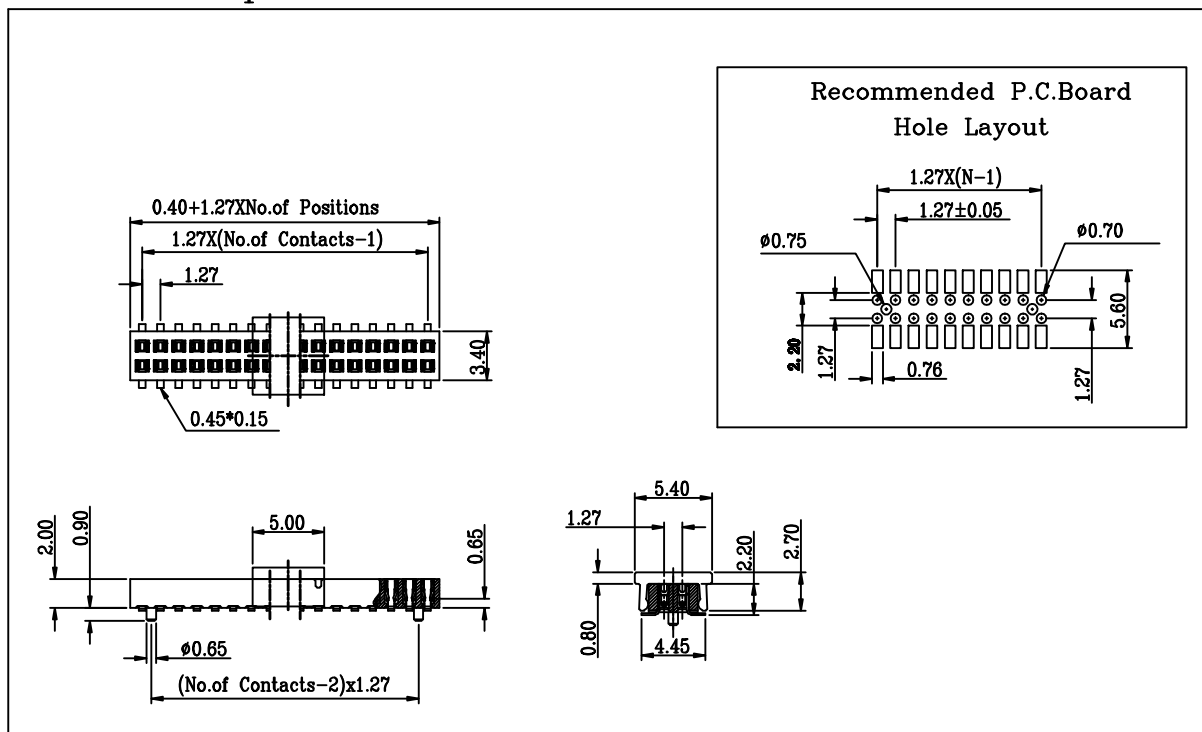

How to order

6	0	6	-	1	-		-		-		-		-		-		-	
Serie-Nr.				Nr. of Contact.		No. of Row		Plating		Cap Option		Packing Option		Location Peg				

Number of contact	Code
Double Row Max. 80	04-80

Plating option	Code
Gold plated	10
Tin plated	50

Packing Option	Code
Tube	1
Tape & Reel	2

Location Peg Option	Code	Note
W/ Location Peg	10	6Pin Min
W/O Location Peg	00	

No. of Row	Code
Double Row	2

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

W.E.