


619

Side entry female header 2.0mm pitch single row

Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : Pitch 2.0mm, □0.50mm male header

RoHS Compliant

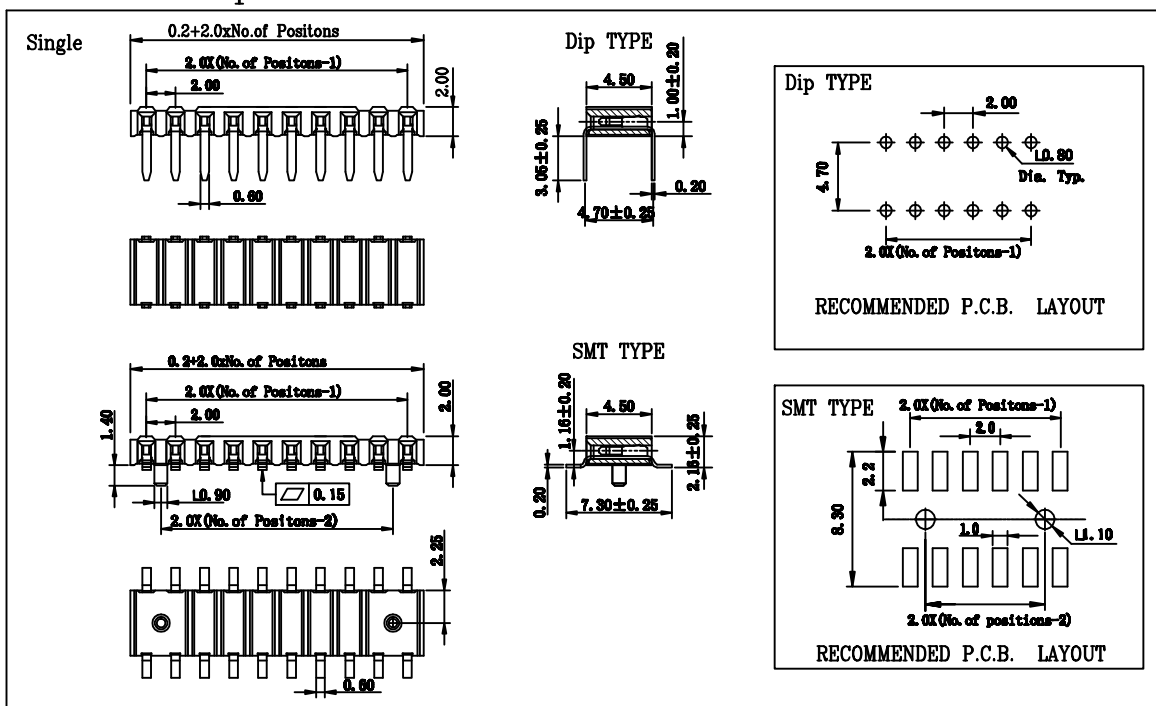

How to order 6 1 9 - [] [] [] - [] [] - [] [] - [] [] - [] []
 Serie-Nr. Nr. of Contact. profile Connector Type Plating packing Location Peg

Number of contact	Code
single 02-30 poles(Dip type)	02-30
single 02-20 poles(SMT type)	02-20

Profile	Code
2.0mm single	3

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60

Packing option	Code
Tube	1
Tape & Reel	2

Connector Type	Code
Dip Type	10
SMT Type	20

Location Peg Option	Code	Note
W/ Location Peg	10	3Pin Min
W/O Location Peg	00	

W.E.