


619

Side entry female header 2.0mm pitch double row A Type


Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : Pitch 2.0mm, □0.50mm male header



RoHS Compliant

A TYPE

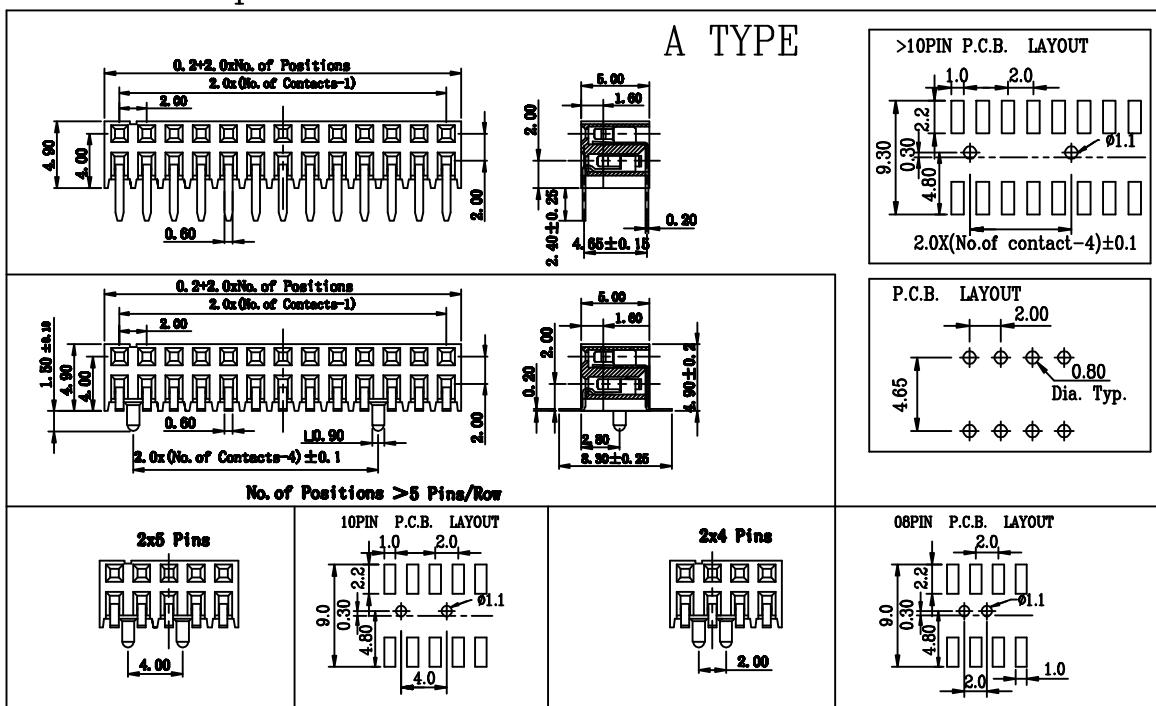

How to order

6 1 9 - [] [] [] - [] [] - [] [] - [] [] - [] []
 Serie-Nr. Nr. of Contact. profile Connector Type Plating packing Peg

Number of contact	Code
06-50 poles	06-50

Profile	Code
4.9mm A Type	1
4.3mm B Type	2

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10U" Selective gold plated	610
20U" Selective gold plated	620

Packing option	Code
Tube	1
Tape & Reel	2

Connector Type	Code
Dip Type	10
SMT Type	20

Location Peg Option	Code	Note
W/ Location Peg	10	8Pin Min
W/O Location Peg	00	

W.E.