


# 381


## D-SUB Dual Port Connector

Technical data :  
 SHELL: STEEL MATERIAL, TIN FINISH  
 INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,  
 UL 94V-0 RATED, BLACK COLOR  
 CONTACT MATERIAL: BRASS OR PHOSPHOR BRONZE  
 CONTACT FINISH: SELECTIVE GOLD FLASH  
 GROUNDING BRACKET: BRASS MATERIAL, TIN FINISH  
 RIVETED INSERT: BRASS MATERIAL, NICKEL FINISH  
 CONTACT CURRENT RATING: 5.0 AMPS  
 CONTACT RESISTANCE: 30mOHM MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN  
 INSULATION RESISTANCE: 1000 MOHM MIN  
 TEMPERATURE RATING: -55°C~+105°C


25 Poles female over 9 poles & H.D. 15 poles female

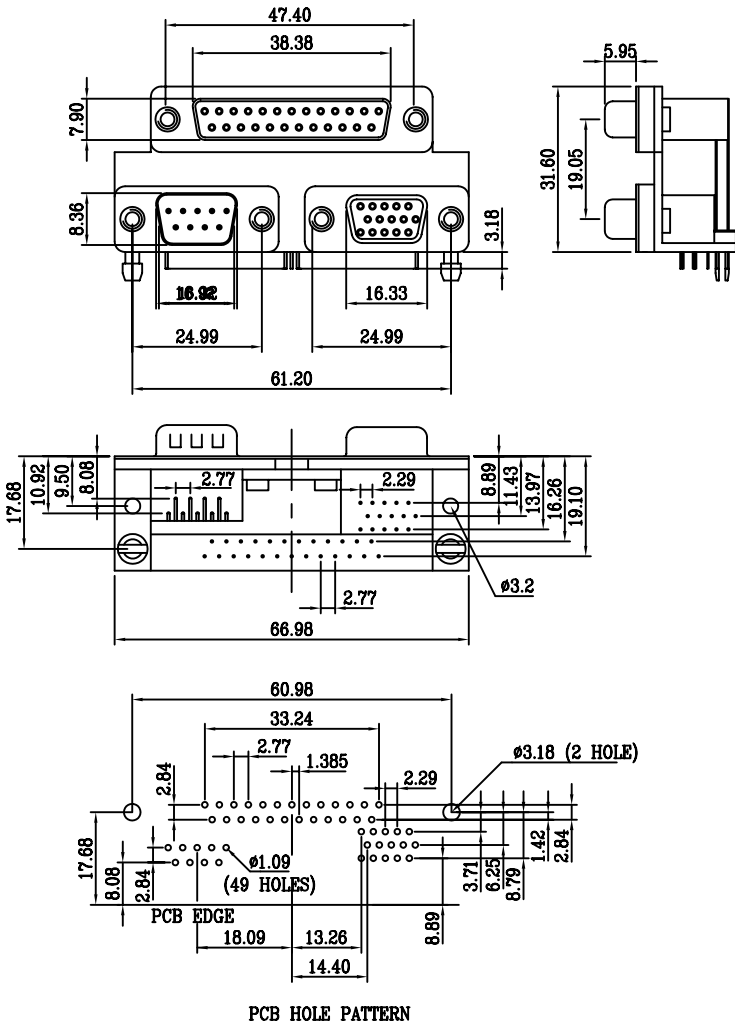

25 poles female over 2 pcs of 9 poles male

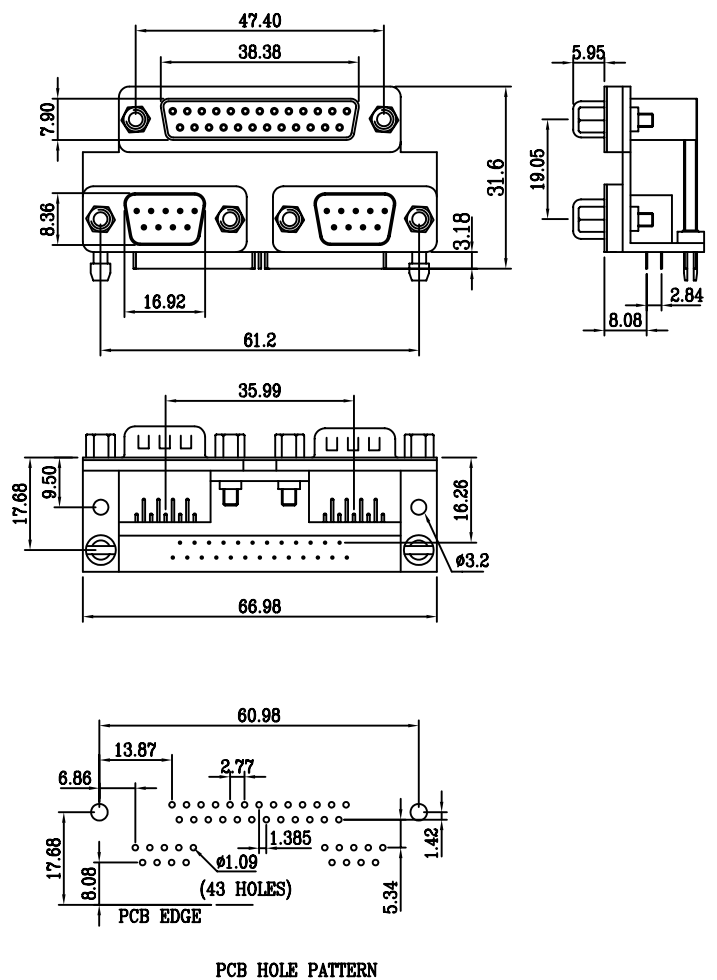

### How to order Serie 381



Connector Type	Code
25-09/15	10
25-09/09	20

Hexagonal Bolt Option	Code
Loose Hexagonal Bolts	10
Assembled Hexagonal Bolts	20

W.E.