




- These connectors have 3 or 6 cavities for high current, coaxial or fiber optic contacts. The MPC on type L and M provides alignment guides and accepts optional coding keys. The half-size type N is also provided with guiding and polarized pegs.

[illegible]



Technical drawing of a mechanical part showing a cross-section. The drawing includes dimensions: 3.75, 3, and 3.65.

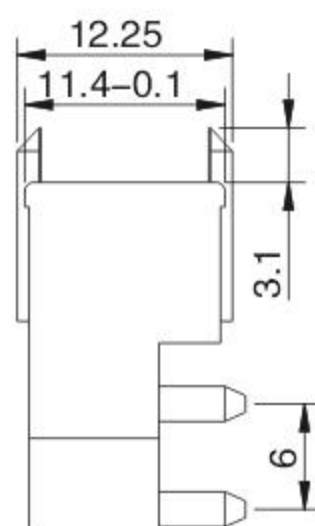

Technical drawing of a mechanical part with dimensions and a grid. The drawing shows a side view of a component with a central section and a grid of 10x20 squares. Dimensions include 3.7, 3, 10x2=20, 15, 3.65, and 25. The grid is labeled with letters a, b, c, d, e on the right side.

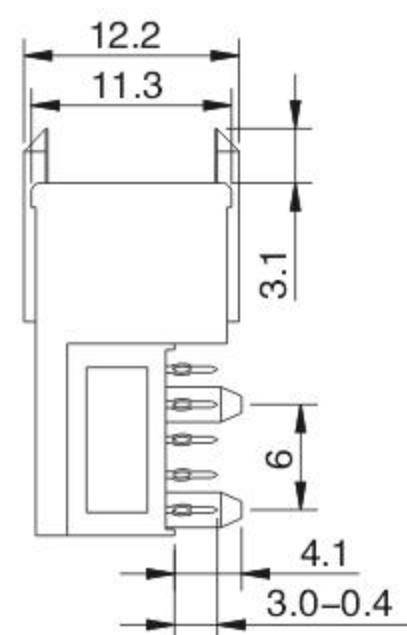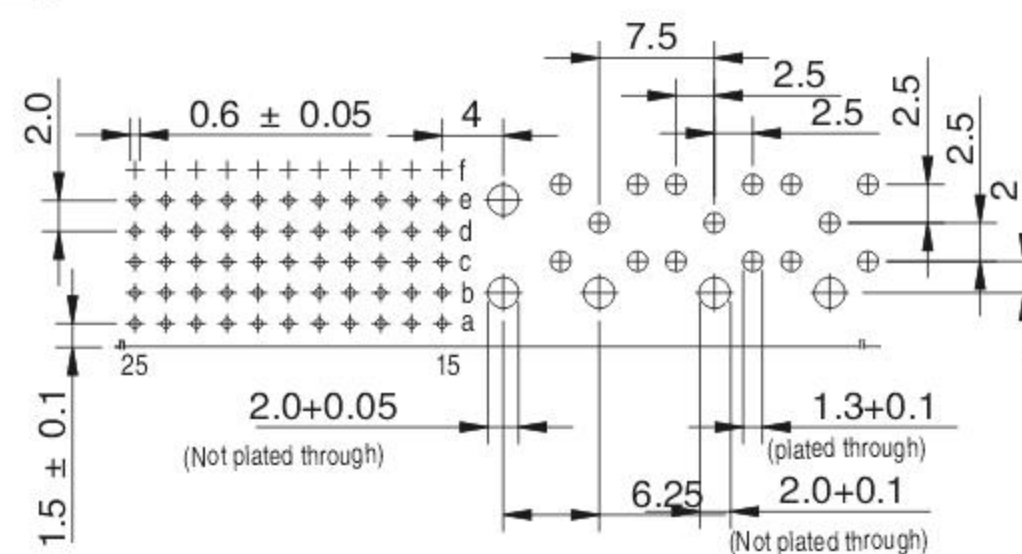

Technical drawing of the 3000 Series 1/2" (6.35 mm) connector. The drawing shows two views: a top view and a side view. The top view indicates a maximum width of 3.75 and a height of 6.25. The side view shows a height of 20.4 and a width of 25.

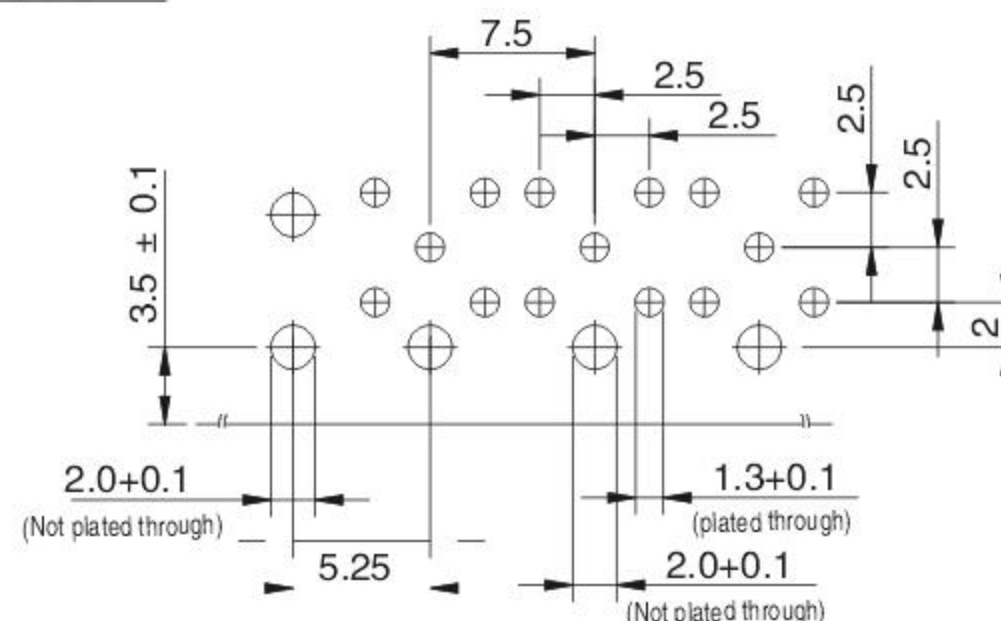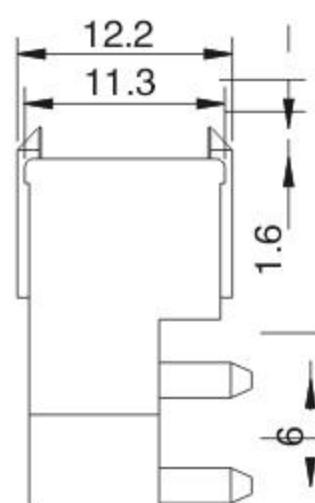

WEITRONIC ENTERPRISE CO., LTD. Web.Site: www.weitronictw.com.tw E-mail: wee@weitronictw.com.tw