


521

.079"(2.0mm) Shrouded Header and Crimp Housing and Contact 02 to 16 Contacts

Technical data :
 Contact Material : Copper alloy
 Applicable wires : AWG # 24 to 32
 Wafer(Housing) Material : Nylon, UL 94V-0
 Current Rating : 1A AC, DC
 Voltage Rating : 100V AC Maximum
 Temperature Range : -25°C~+90°C
 Contact Resistance : 20 mOhm Max
 Insulation Resistance : 1000 MOhm min
 Withstand Voltage : 1500V AC/minute
 P.C.Board Thickness : 1.6mm(.063")

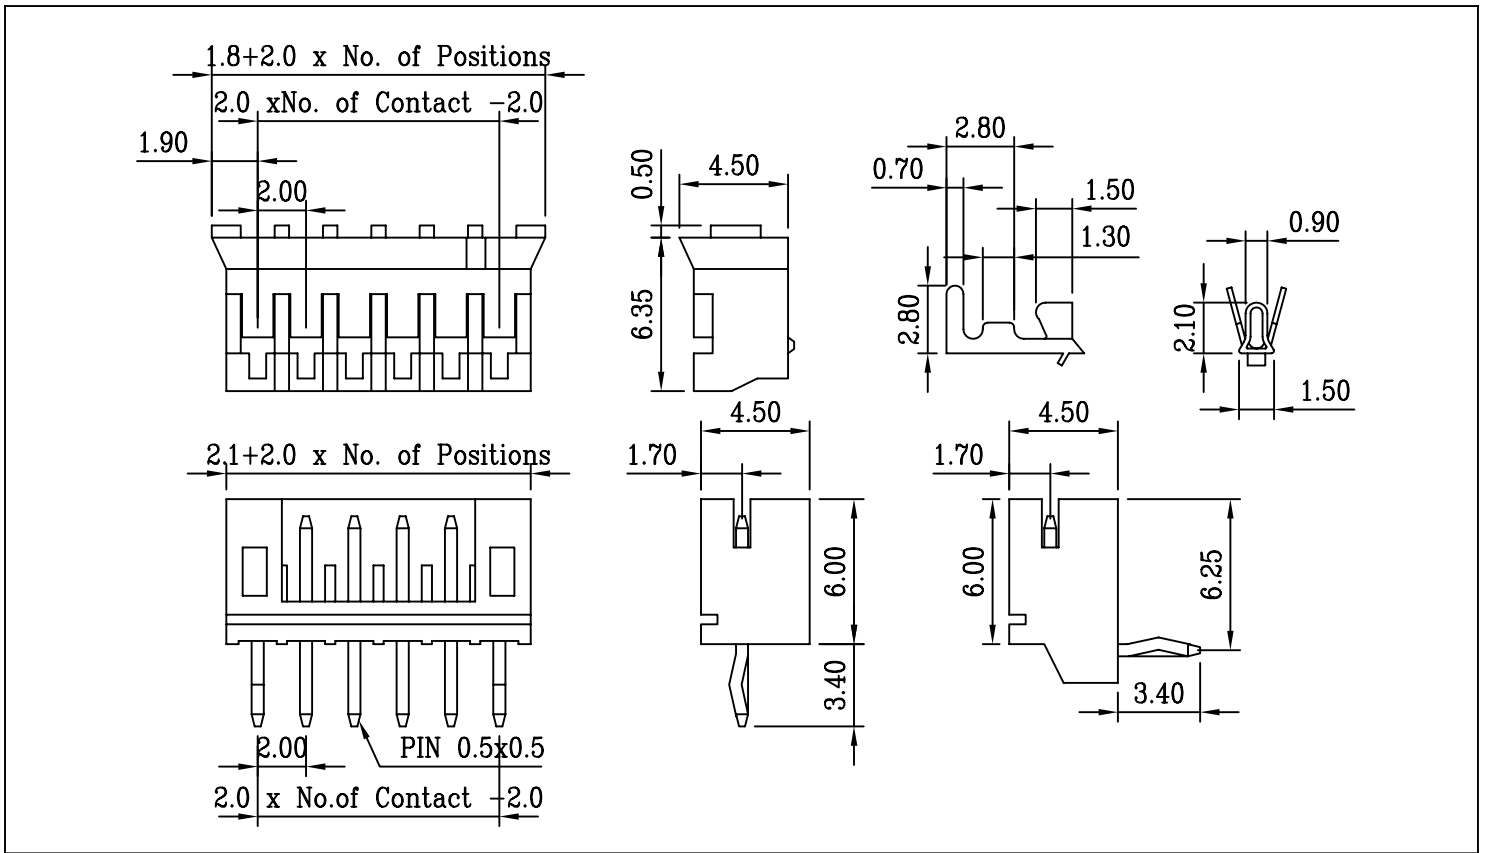

How to order - -

Serie-Nr. Nr. of contact Connector Type Contact Plating

Nr. of contact	code
02~16	02~16

Connector type	Code
Housing	1
Contact	2
Header straight	3
Header Right Angle	4

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for housing	