

532

.156"(3.96mm) Power Connector 06 to 12 Contacts

Technical data :

6 Circuits

Contact Material : Copper alloy

Wafer Material : Nylon, UL 94V-0

Current Rating : 5A AC, DC

Voltage Rating : 250V AC Maximum



Temperature Range : -25°C~+90°C

Contact Resistance : 20 mOhm Max

Insulation Resistance : 1000 MOhm min


Withstand Voltage : 1500V AC/minute

P.C.Board Thickness : 1.6mm(.63")

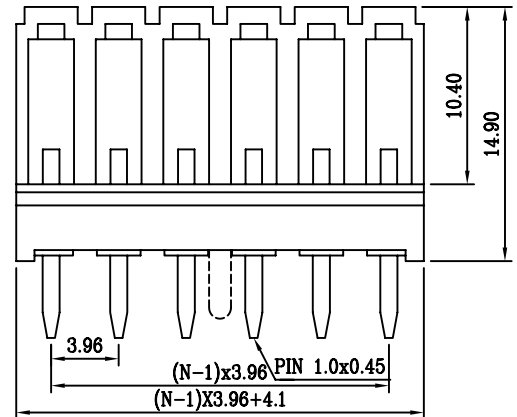
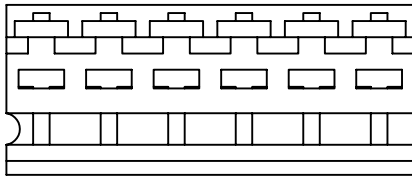


P.C.B. Layout

6 pin

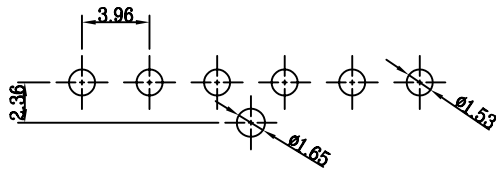

12pin

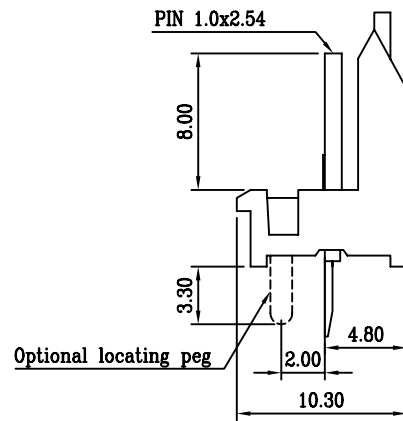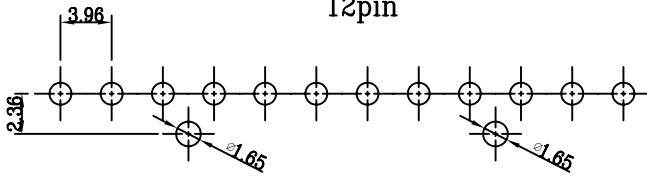

How to order

5 3 2 - [] [] [] - [] [] - [] []

Serie-Nr.

Nr.of contact

Connector Type

Plating

Location peg option

Nr. of contact	code
06~12	06~12

Connector type	Code
Straight	1

Plating	Code
Gold Plated	10
Tin Plated	50

Location peg option	Code
W/ location peg	10
W/O location	00
For 6 & 12 pin only Omit for others size	