

584


.165" (4.20mm) Crimp Housing and Contact (Plug)

FEATURES:


- . 2-24 Circuits
- . Positive Housing locks
- . Nylon 66 [UL 94V-2], Nature
- . 10 milliohm contact resistance
- . Stright Angle, Duable Row Peg Mounted
- . Fully isolated terminals

SPECIFICATIONS:

- . Current rating: 9A AC. DC Per circuit
- . Voltage rating: 600 (RMS)
- . Temperatur range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10m Ω max.
After environmental testing/20m Ω max.
- . Insulation resistance: 1000M Ω min
- . Withstand Voltange: 1500V AC/minute
- . Applicable P.C.Board thickness: .070" [1.78mm] max.

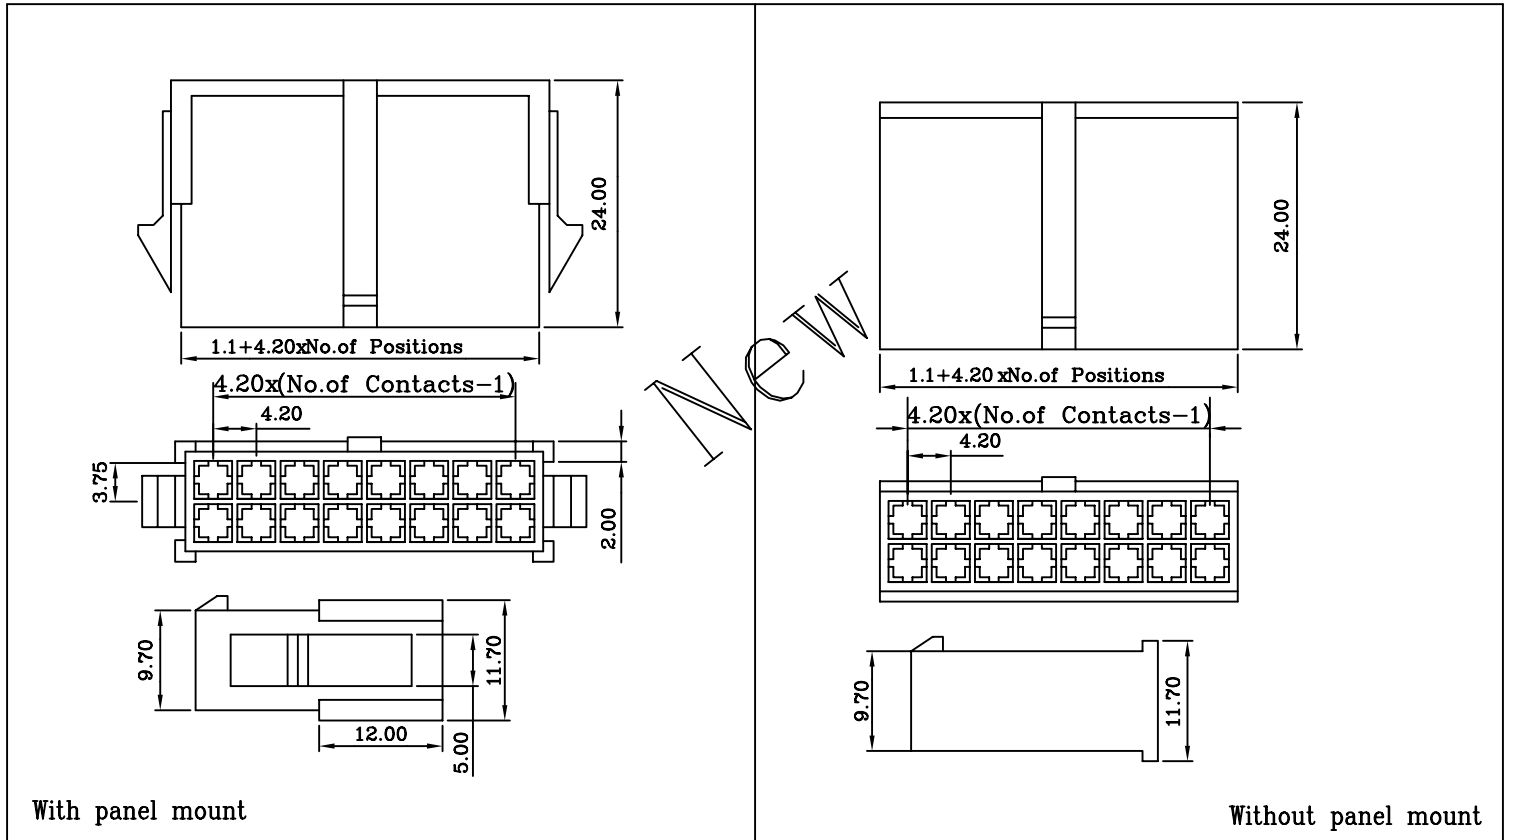

How to order



Nr. of contact	$1.1 + 4.20 \times \text{No. of Positions}$	$4.20 \times (\text{No. of Contacts} - 1)$
2	5.30	---
4	9.50	4.20
6	13.70	8.40
N	---	---

Connector Type	Code
Housing with panle mount	1
Housing w/o panle mount	2
Contact	3

Contact Plating	Code
Tin	50
Gold Flash	10
Selective Gold	60
only for contact	

Nr. of contact	Code
02 ~ 24 pins	02 ~ 24

W.E.