585

.165"(4.20mm) double Row Right Angle Header

FEATURES:

. 2-24 Circuits
. Positive Housing locks
. Nylon 66 [UL 94V-2] or[UL 94V-0], Nature
. 10 milliohm contact resistance
. Stright Angle, Duable Row Peg Mounted
. Fully isolated terminals
. Low engagement force terminals

SPECIFICATIONS:

. Current rating: 9A AC. DC Per circuit
. Voltage rating: 600 (RMS)
. Temperatur range: -40°C ~+105°C
. Contact resistance: Initial Value/10mΩ max.
After environmental testing/20mΩ max.
. Insulation resistance: 5000MΩ min
. Withstand Voltange: 1500V AC/minute
. Applicable P.C.Board thickness:.070"[1.78mm] max.

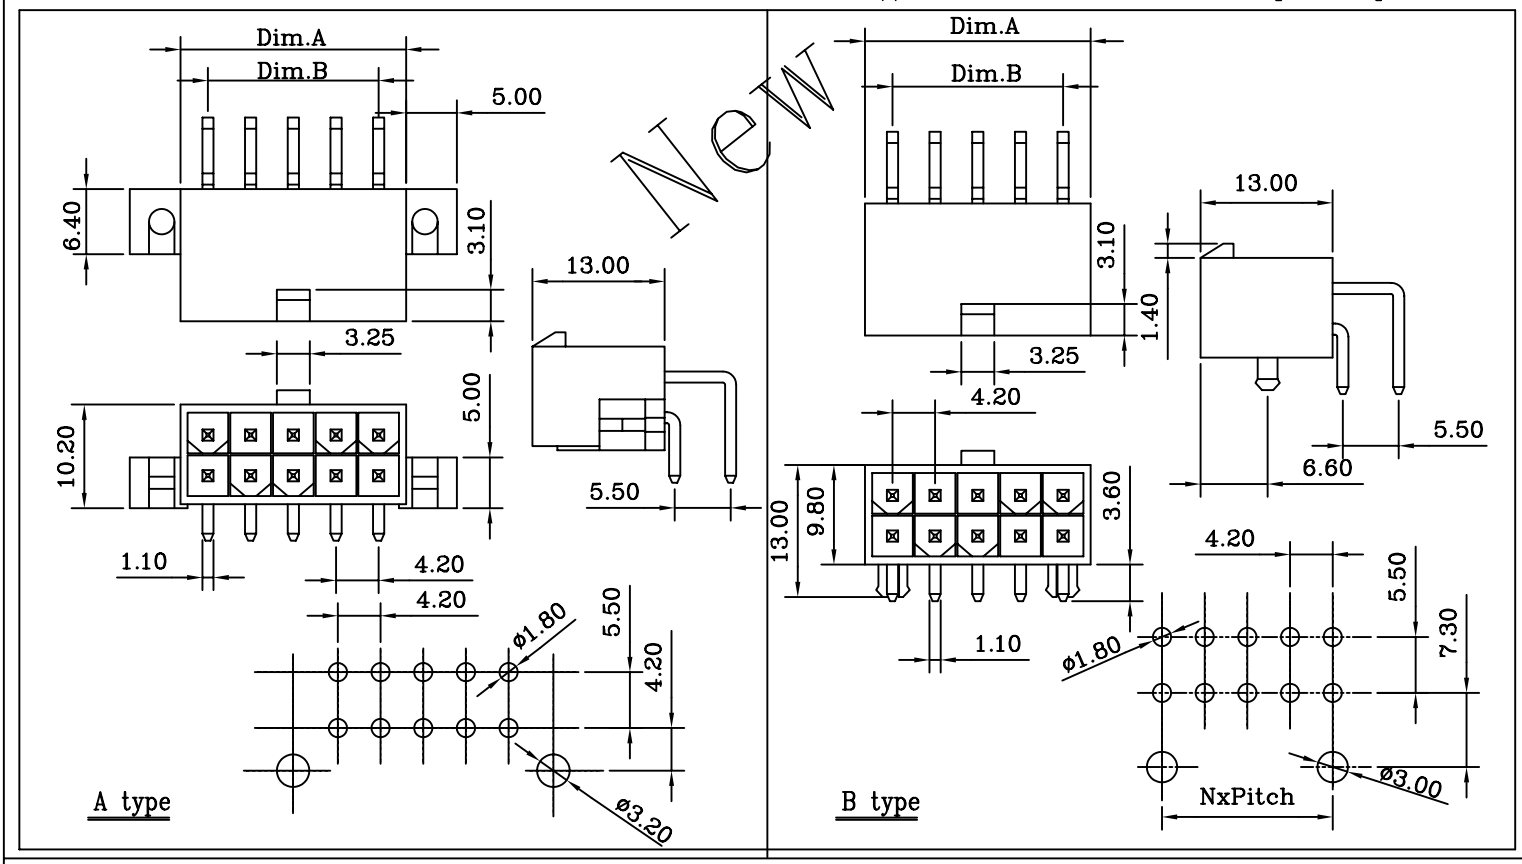

How to order 5 8 5 — □□ — □□ — □□

Serie-Nr. | Nr. of contact | Connector Type | Contact Plating

Nr.Of Contact	Dimensions(mm)		Code
	A	B	
2	5.4	---	02
4	9.60	4.2	04
6	13.80	8.40	06
8	18.0	12.6	08
10	22.2	16.8	10
12	26.4	21.0	12
14	30.6	25.2	14
16	34.8	29.4	16
18	39.0	33.6	18
20	43.2	37.8	20
22	47.4	42.0	22
24	51.6	46.2	24

Connector Type	Code
A type	10
B type	20

Contact Plating	Code
Tin	50
Gold Flash	10
Selective Gold	60

W.E.