

Technical Data :

[illegible]

Profile 1


Dimensions and Labels:

- $D = N \times 1.27 + 1.95$
- $E = (N-1) \times 1.27$
- $F = N \times 1.27 + 0.95$
- $A = N \times 1.27 + 5.08$
- $B = N \times 1.27 + 2.75$
- $C = N \times 1.27 + 3.15$
- $N \times 1.27 + 3.75$


Labels: Contact Solder, Clips, Housing, aN, a1.

Recommend PCB Layout

Profile 2

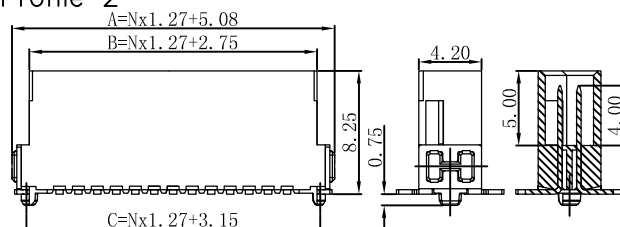

Profile 3

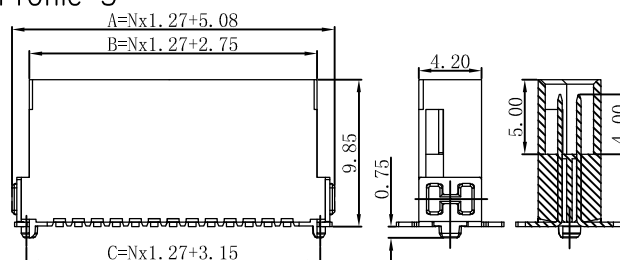

Current Rating :

No of pos	Ambient Temp		
	20°C	70°C	100°C
12	1.6A	1.1A	0.7A
26	1.3A	0.9A	0.6A
50	1.1A	0.8A	0.5A
68	1.0A	0.8A	0.5A
80	1.0A	0.8A	0.5A

How to order

9
1
5
—

—

—

—

—

Serie—Nr. Nr.of Contact Profile Plating Cap Option Packing Option

Nr. of contact	Dimensions(mm)						Code
	A	B	C	D	E	F	
12	12.70	10.37	10.77	9.57	6.35	8.57	12
16	15.24	12.91	13.31	12.11	8.89	11.11	16
26	21.59	19.26	19.66	18.46	15.24	17.46	26
50	36.83	34.50	34.90	33.70	30.48	32.70	50
68	48.26	45.93	46.33	45.13	41.91	44.13	68
80	55.88	53.55	53.95	52.75	49.53	51.75	80

06-10 Pins and 82-98 Pins, Please contact factory.
16 Pins for profile H=6.75mm and H=8.25mm only.

Plating option	Code
Full gold flash plated	10
Selective gold flash plated	60
10u" Selective gold plated	610
30u" Selective gold plated	630

Cap option	Code
W/Cap	1
W/O Cap	2

Packing option	Code
Tube	1
Tape & Reel	2

Profile	Code
H=6.75mm	1
H=8.25mm	2
H=9.85mm	3

W.E.