

920

5.00mm Pitch Mini-Power Socket,Vertical Type


Technical Data :

Insulator Material: High Temperature Thermoplastic,LCP,UL 94V-0
Contact Material: stamped and formed,Copper Alloy
Clip Material: stamped and formed,Copper Alloy
Contact Plating: Au or Tin over Nickel
Clip Plating: Matt Sn over Nickel
Current Rating : 24.7A
Voltage Rating: 600VAC/848VDC
Operating Temperature : -55°C to +105°C With Tin
 -55°C to +125°C With Gold
Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
Mates with : 921





RoHS Compliant

W/Location Peg

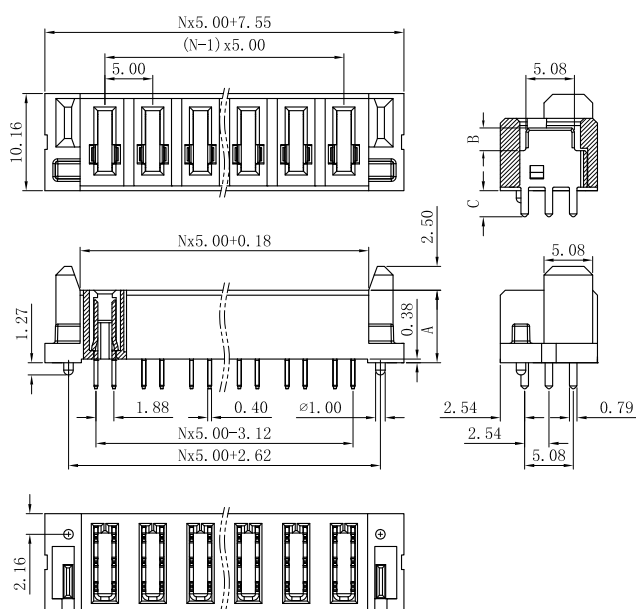

W/Locking Clip

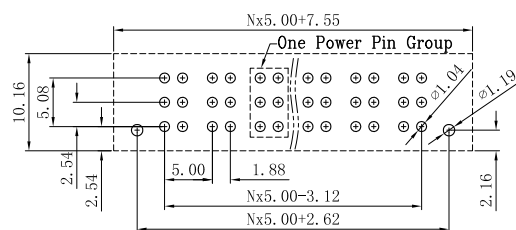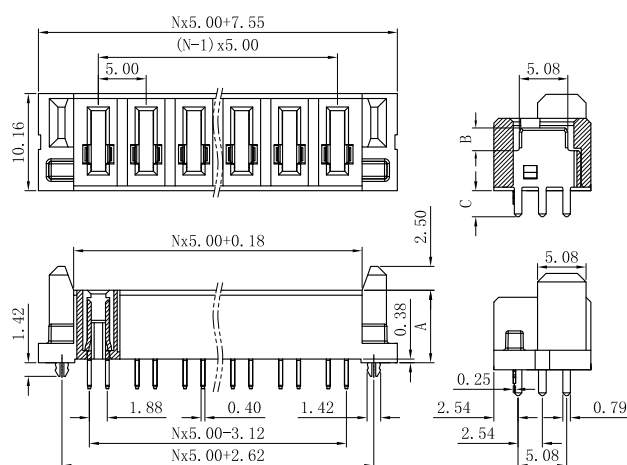

Recommended PCB Layout

How to order

9 2 0 - - - - - -
 Serie-Nr. Nr. of Contact Terminal type Plating Location option Cap Packing

Nr. of contact	Code
02	02
03	03
04	04
06	06
08	08

Terminal type			Code
Dimensions(mm)			
A	B	C	
7.58	2.37	2.72	10
7.58	2.37	3.52	11
7.58	2.37	4.32	12

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610

Location option	Code
W/Location Peg	10
W/Locking Clip	20
Pick&Place Cap	Code
W/O Cap	2
Packing option	
Tube	1
Tray	3

W.E.