


C-343 Cable

2.0mm IDC Cable strips

Technical Data :

Insulator Material: Thermoplastic,UL 94V-0
 Contact : stamped and formed,Phosphor Bronze
 Contact Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute
 Operating temperature: -40°C to +105°C
 Mates with: Pitch 2.0mm 0.50mm male headle
 Wire size: 28AWG (1.0mm pitch)

RoHS Compliant

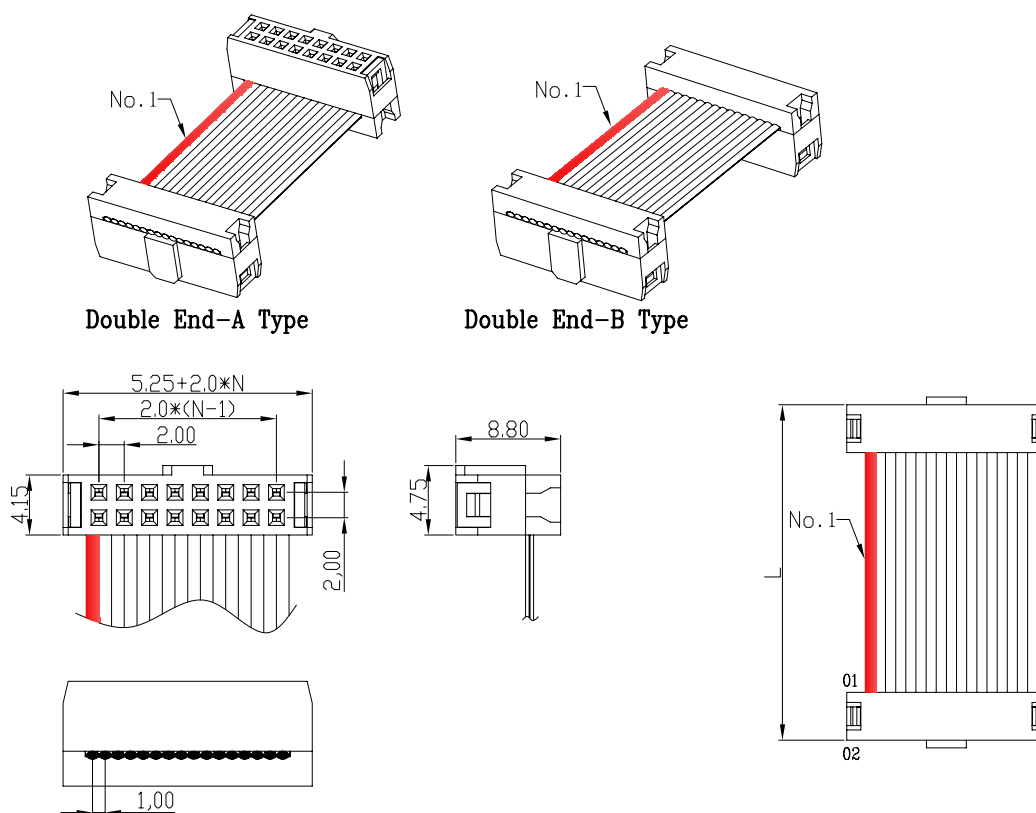

How to order

C - 3 4 3 - - -
 Serie-Nr. Nr.of contact End option Assembled Length

Nr.of Contact
04,06,08,10,12,14,16
18,20,22,24,26,30
34,40,44,50,60

End option	Code
Double End-A Type	10
Double End-B Type	11

Assembled Length/L	Code
300mm	300
xxx As Request	
FOR Eg.L=450; CODE Nr.=450	

W.E.


C-343-1 Cable

2.0mm IDC Cable strips


Technical Data :

Insulator Material: Thermoplastic,UL 94V-0
Contact : stamped and formed,Phosphor Bronze
Contact Plating: Au or Sn over Nickel
Current Rating : 1 Amp
Contact resistance: 20 milliohms Max.
Insulator resistance : 1000 Megohms min.
Dielectric withstanding : AC 500V for 1 Minute
Operating temperature: -40°C to +105°C
Mates with: Pitch 2.0mm 0.50mm male headle
Wire size: 28AWG (1.0mm pitch)




RoHS Compliant



Double End-C Type



Double End-D Type

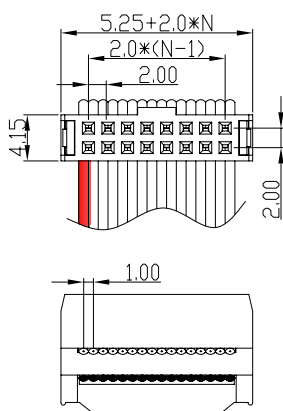

How to order

C-343-1- - - -
Serie-Nr. Nr. of contact End option Assembled Length

Nr. of Contact
04,06,08,10,12,14,16
18,20,22,24,26,30
34,40,44,50,60

End option	Code
Double End-C Type	20
Double End-D Type	21

Assembled Length/L	Code
300mm	300
xxx As Request	
FOR Eg.L=450; CODE Nr.=450	

W.E.