



Vertical Male Type Q Connectors-Inversed 64 Positions

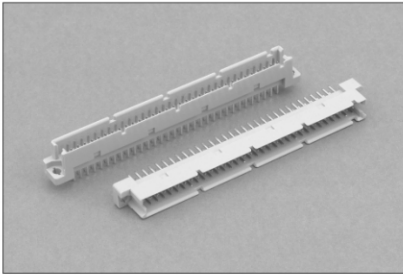



Option:

- Extended male contact
- Connector with pre-installed snap-in mounting clips.
- Variations
- Please refer to page 46 for complete part number coding
- Other variations, please consult factory

Dimensions

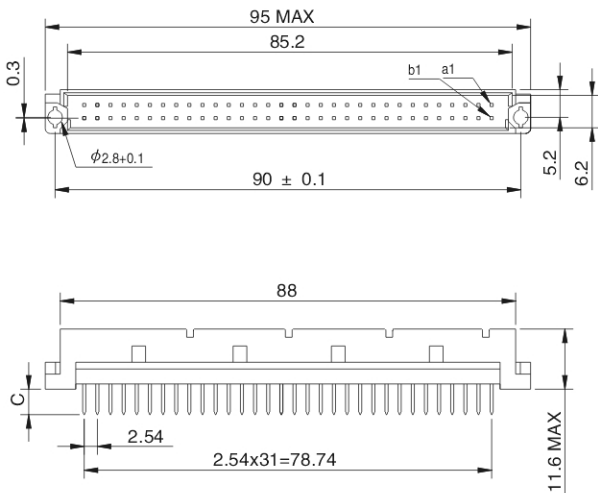

Recommended P.C.B. layout

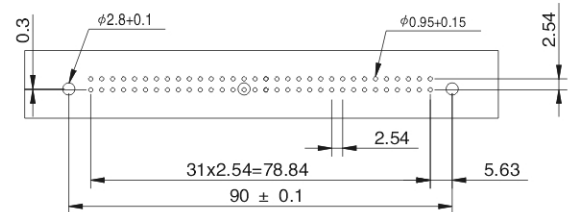

CODE NO.	10	12	30	40
C =	2.5	4	13	17
T =	0.6x0.6	0.6x0.6	0.6x0.6	0.6x0.6

Ordering Information

NO. OF CONTACTS		64	32	32	16
POSITION		a+b	a	a+b (2.4.6....)	a(2.4.6....)
TERMINATION	QUALITY	PART NUMBER			
2.5 mm	III	130-2-643-10-10	130-2-321-10-10	130-4-323-10-10	130-4-161-10-10
	II	130-2-643-10-20	130-2-321-10-20	130-4-323-10-20	130-4-161-10-20
4.0 mm	III	130-2-643-12-10	130-2-321-12-10	130-4-323-12-10	130-4-161-12-10
	II	130-2-643-12-20	130-2-321-12-20	130-4-323-12-20	130-4-161-12-20
13.0 mm	III	130-2-643-30-10	130-2-321-30-10	130-4-323-30-10	130-4-161-30-10
	II	130-2-643-30-20	130-2-321-30-20	130-4-323-30-20	130-4-161-30-20
17.0 mm	III	130-2-643-40-10	130-2-321-40-10	130-4-323-40-10	130-4-161-40-10
	II	130-2-643-40-20	130-2-321-40-20	130-4-323-40-20	130-4-161-40-20

Remarks:

- 10---Straight solder,tail lenght 2.5mm
 12---Straight solder,4mm tail lenght
 30---Straight Wrap post 13.0mm tail lenght
 40---Straight Wrap post 17.0mm tail lenght

T---Cross section of wrap post(Thickness x Width)

Dimensions shown are for reference purpose only, All dimensions are in millimeters unless othrwise specified.